

Liftronic® Mobile

The Intelligent Device for Handling you can easily move wherever you need



Advantages




- **Easy and safe** to move around
- **Easy interchange of grippers** for handling different types of load
- **Solution**
- Versatile: from mobile to fixed position very easy with optional base platform

Safety



) Acoustic alarm





Arm

In case of rope damage a mechanical safety device prevents the arm from lowering



Battery

In case of low battery power, the system allows the arm to be moved to a rest or unload position; a low battery message will then be displayed




Switch-off

In case of accidental switch-off, the system allows arm to be moved to a rest or unload position

Liftronic® Mobile

Suitable for different load grippers



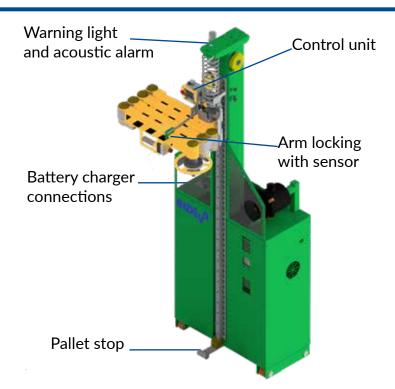



Very agile



Precise

Ergonomic



Zero Gravity

4 JOINTS

3 on the arm + 1 on the gripper coupling



ORIENTATION

On the left or on the right according to the work area side



SWIVEL JOINT

On the end of arm for continuous rotation around the gripper axis



Technical data

- **Load capacity:** max 50 kg including gripper; with a vacuum gripper: max 25 kg
- Arm length: 2530 mm
- **Column height:** 2 choices: 2350 2750 mm
- Vertical stroke: 1500/1900 mm based on column height
- Overall size: 812 x 851 x 2440/2840 mm (depends on column height)
- Vacuum gripper: air through the arm, no pipes

